

CLOCKAUDIO

C006E
BOUNDARY
LAYER
PROFESSIONAL
MICROPHONE

MINI MIC

Small, light, sensitive and designed for a wide range of Pro Audio applications including conference, lectern and theatre.





- Boundary layer condenser microphone
- Half Cardioid Polar Pattern
- Low profile
- Stone Grey Nextel finish

CLOCKAUDIO

C006E BOUNDARY LAYER PROFESSIONAL MICROPHONE

SPECIFICATIONS

| | |
|------------------------|---|
| TYPE | Condenser (back electret) |
| POLAR PATTERN | Half Cardioid |
| FREQUENCY RESPONSE | 50 Hz - 18 KHz |
| SENSITIVITY | -48 dB +/- 3 dB @ 1 KHz (0 dB = 1 V/Pa) |
| IMPEDANCE | 200 Ohms |
| S/N RATIO | 64 dB(A) |
| MAXIMUM SPL | 120 dB 1% THD |
| POWER REQUIREMENTS | 9 - 48 volts phantom power |
| SWITCHABLE BASS FILTER | -4 dB per octave at 400 Hz to -6 dB per octave at 100 Hz |
| SWITCHABLE PAD | -10 dB |
| CABLE | 3 metres |
| TERMINATION | XLR |
| DIMENSIONS | 39mm x 16.4mm |
| FINISH | Stone Grey Nextel |

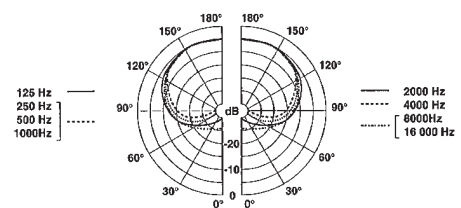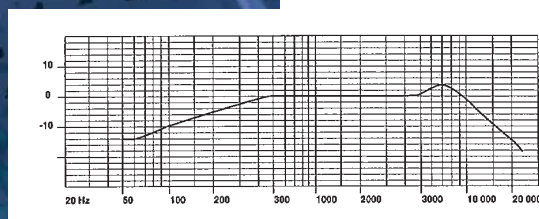

CLOCKAUDIO®

Clockaudio Ltd - Headquarters

22 Amside Road, Waterlooville, Hampshire PO7 7UR, UK
Tel +44 (0)23 9225 1193 • Fax +44 (0)23 9225 1201
e-mail sales@clockaudio.co.uk

Clockaudio North America Inc.

2891 du Meunier, Unit 103, Vaudreuil-Dorion, Quebec J7V 8P2, Canada
Tel: (450) 424-9797 • Fax: (450) 424-3660
e-mail: info@clockaudio.com

www.clockaudio.com

PROFESSIONAL
MICROPHONE
SYSTEMS

As part of a continuous product improvement programme, we reserve the right to alter specifications without prior notice.