


CLOCKAUDIO

C007/C007E
BOUNDARY
LAYER
PROFESSIONAL
MICROPHONE

Designed for surveillance and recording in sensitive areas - banks, airports, railway stations, law courts, conference and convention centres.

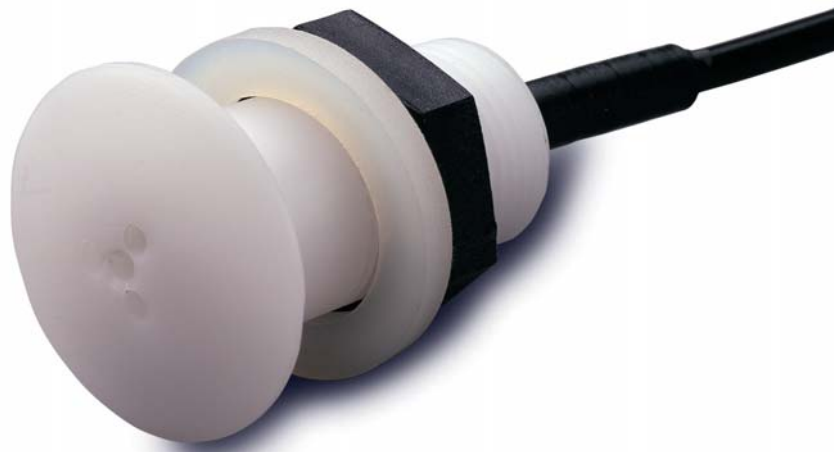


- Boundary layer condenser
- Omnidirectional
- High quality engineering
- Non-reflective delrin
- Non-conductive body
- Ease of mounting
- Opaque white finish for low visibility mounting

CLOCKAUDIO


C007/C007E BOUNDARY LAYER PROFESSIONAL MICROPHONE

SPECIFICATIONS

TYPE	Condenser (back electret)
POLAR PATTERN	Omnidirectional
FREQUENCY RESPONSE	50 Hz - 20 KHz
SENSITIVITY	- 42.5 dB +/- 3 dB at 1 KHz (0 dB = 1 V/Pa)
IMPEDANCE	C007E 200 Ohms C007 1 K Ohms
S/N RATIO	40 dB(A)
MAXIMUM SPL	120 dB 1% THD
POWER REQUIREMENTS	C007E 9 - 48 volts phantom power C007 2V - 10V max through series resistor optimum voltage 6.0V
SWITCHABLE BASS FILTER	C007E - 4 dB per octave at 400 Hz to - 6 dB per octave at 100 Hz
SWITCHABLE PAD	C007E - 10 dB
CABLE	1 metre
TERMINATION	C007E - XLR C007 - open end
DIMENSIONS	Head dia. 20mm overall length 25mm
MOUNTING	M12 x 1 nut and washer
FINISH	Matt White

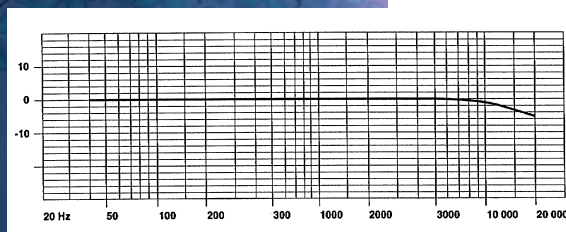

125 Hz
250 Hz
500 Hz
1000Hz



2000 Hz
4000 Hz
8000Hz
16 000 Hz

CLOCKAUDIO®

Clockaudio Ltd - Headquarters

22 Amside Road, Waterlooville, Hampshire PO7 7UR, UK
Tel +44 (0)23 9225 1193 • Fax +44 (0)23 9225 1201
e-mail sales@clockaudio.co.uk

Clockaudio North America Inc.

2891 du Meunier, Unit 103, Vaudreuil-Dorion, Quebec J7V 8P2, Canada
Tel: (450) 424-9797 • Fax: (450) 424-3660
e-mail: info@clockaudio.com

www.clockaudio.com

PROFESSIONAL
MICROPHONE
SYSTEMS