

CLOCKAUDIO®

C009E-RF SERIES
'RF FRIENDLY'
BOUNDARY LAYER
PROFESSIONAL
MICROPHONE

Designed for easy use on large surfaces in a wide range of professional sound situations. Ideal for mounting on walls, floors, piano etc. The hemispherical polar pattern provides natural sound with a good sense of depth for optimum bass.





- Immune to RF artifacts
- Boundary layer condenser microphone
- Omni directional polar pattern
- Wide range smooth response
- Very low profile
- Non-reflective stone grey Nextel finish

PROFESSIONAL
MICROPHONE
SYSTEMS

C009E-RF SERIES 'RF FRIENDLY' BOUNDARY LAYER PROFESSIONAL MICROPHONE

SPECIFICATIONS

TYPE	Condenser (Back Electret)		
POLAR PATTERN	Omni Directional (Beyond Boundary)		
FREQUENCY RESPONSE	30Hz - 20KHz		
SENSITIVITY	-42.5dB \pm 2dB @ 1KHz (0dB = 1VPa)		
IMPEDANCE	200 Ohms		
S/N RATIO	68dB (A)		
MAXIMUM SPL	120dB 1% THD		
POWER REQUIREMENTS	9 - 48 Volts Phantom Power		
CABLE	3 metres		
TERMINATION	Male 3 Pin XLR		
DIMENSIONS	Diameter	Height	Weight
	160mm (6.3")	9mm (0.35")	1.528g (3.37lb)
FINISH	Stone Grey or Black Nextel		
SHIPPING INFORMATION	Length	250mm (9.85")	
	Width	250mm (9.85")	
	Depth	55mm (2.17")	
	Weight	1.728g (3.81lb)	

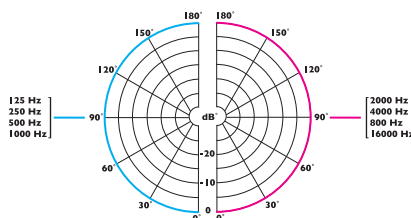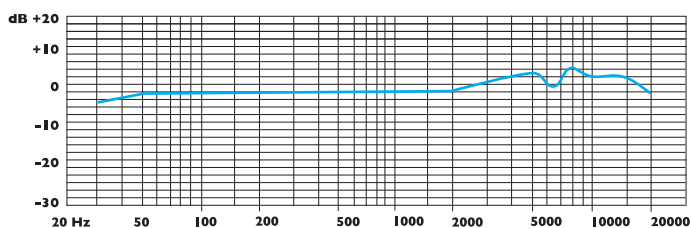

CLOCKAUDIO®

22 Arnside Road, Waterlooville, Hampshire PO7 7UP
Tel +44 (0)23 9225 1193 • Fax +44 (0)23 9225 1201
E-mail sales@clockaudio.co.uk www.clockaudio.com

Clockaudio North America

2891 du Meunier, Vaudreuil-Dorion, QC J7V 8P2, Canada
Tel: (514) 453-1838 • Fax: (514) 323-3773
E-mail: info@clockaudio.com www.clockaudio.com



PROFESSIONAL
MICROPHONE
SYSTEMS