

CLOCKAUDIO®

C3SE-RF
'RF FRIENDLY'
SUSPENDED
CARDIOID
CONDENSER
MICROPHONE

Wideband cardioid condenser microphone designed to be suspended in places of worship, conference halls, theatres etc.



- Immune to RF artifacts
- Slimline design
- Engineered in high quality brass
- Strong lightweight cable
- Fully balanced and terminated in male 3 pin XLR
- Short flexible shaft
- Knuckle for easy adjustment of vertical angle
- Finished in satin black or white
- Ceiling mount available as optional extra

PROFESSIONAL
MICROPHONE
SYSTEMS

C3SE-RF 'RF FRIENDLY' SUSPENDED CARDIOID CONDENSER MICROPHONE





CP73
CEILING PLATE

Diameter 74mm Height 14mm
fitted with locking cable gland

SPECIFICATIONS

TYPE	Condenser (Back Electret)		
POLAR PATTERN	Cardioid		
FREQUENCY RESPONSE	50Hz - 18KHz		
SENSITIVITY	-47dB \pm 3dB @ 1KHz (0dB = 1 VPa)		
IMPEDANCE	200 Ohms		
S/N RATIO	64dB (A)		
MAXIMUM SPL	125dB 1% THD		
POWER REQUIREMENTS	9 - 48 Volts Phantom Power		
CABLE	7.5 metre (24.6ft)		
TERMINATION	Male 3 Pin XLR		
FINISH	Satin Black/White		
ACCESSORIES	W2 foam windshield included		
DIMENSIONS	Overall Length	Head Diameter	Flexible Shaft Weight
	215mm (8.5")	12mm (0.47")	6mm (0.23") 206g (7.3oz)
SHIPPING INFORMATION	Length	Width	Depth Weight
	360mm (14.18")	40mm (1.58")	40mm (1.58") 238g (8.4oz)

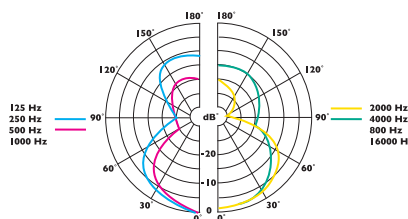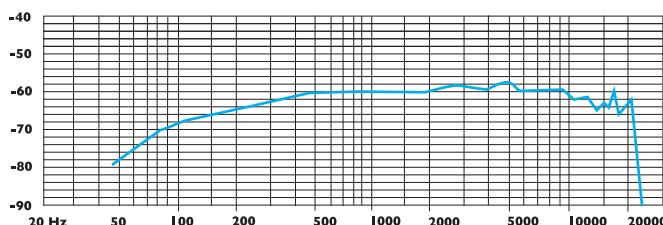

CLOCKAUDIO®

22 Arnside Road, Waterlooville, Hampshire PO7 7UP
Tel +44 (0)23 9225 1193 • Fax +44 (0)23 9225 1201
E-mail sales@clockaudio.co.uk www.clockaudio.com

Clockaudio North America

2891 du Meunier, Vaudreuil-Dorion, QC J7V 8P2, Canada
Tel: (514) 453-1838 • Fax: (514) 323-3773
E-mail: info@clockaudio.com www.clockaudio.com



PROFESSIONAL
MICROPHONE
SYSTEMS