

CLOCKAUDIO®

C3SE-RF
'RF FRIENDLY'
SUSPENDED
CARDIOID
CONDENSER
MICROPHONE

Wideband cardioid condenser microphone designed to be suspended in places of worship, conference halls, theatres etc.



- Immune to RF artifacts
- Slimline design
- Engineered in high quality brass
- Strong lightweight cable
- Fully balanced and terminated in male 3 pin XLR
- Short flexible shaft
- Knuckle for easy adjustment of vertical angle
- Finished in satin black or white
- Ceiling mount available as optional extra

PROFESSIONAL
MICROPHONE
SYSTEMS

C3SE-RF
 'RF FRIENDLY'
 SUSPENDED
 CARDIOID
 CONDENSER
 MICROPHONE





CP73
 CEILING PLATE

Diameter 74mm Height 14mm
 fitted with locking cable gland

SPECIFICATIONS

TYPE	Condenser (Back Electret)			
POLAR PATTERN	Cardioid			
FREQUENCY RESPONSE	50Hz - 18KHz			
SENSITIVITY	-47dB ± 3dB @ 1KHz (0dB = 1 VPa)			
IMPEDANCE	200 Ohms			
S/N RATIO	64dB (A)			
MAXIMUM SPL	125dB 1% THD			
POWER REQUIREMENTS	9 - 48 Volts Phantom Power			
CABLE	7.5 metre (24.6ft)			
TERMINATION	Male 3 Pin XLR			
FINISH	Satin Black/White			
ACCESSORIES	W2 foam windshield included			
DIMENSIONS	Overall Length	Head Diameter	Flexible Shaft	Weight
	215mm (8.5")	12mm (0.47")	6mm (0.23")	206g (7.3oz)
SHIPPING INFORMATION	Length	Width	Depth	Weight
	360mm (14.18")	40mm (1.58")	40mm (1.58")	238g (8.4oz)

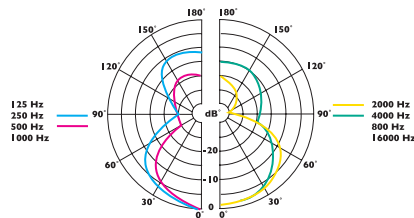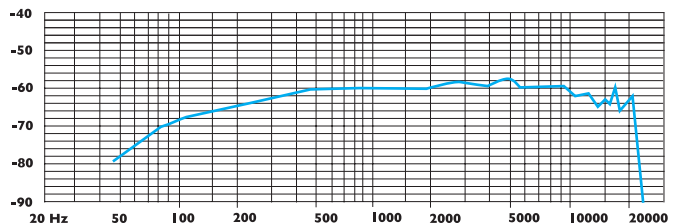

CLOCKAUDIO®

Clockaudio Ltd - Headquarters

22 Arnside Road, Waterlooville, Hampshire PO7 7UP. UK
 Tel +44 (0)23 9225 1193 • Fax +44 (0)23 9225 1201
 e-mail sales@clockaudio.co.uk

Clockaudio North America Inc.

2891 du Meunier, Unit 103, Vaudreuil-Dorion, Quebec J7V 8P2. Canada
 Tel: (450) 424-9797 • Fax: (450) 424-3660
 e-mail: info@clockaudio.com

www.clockaudio.com

PROFESSIONAL
 MICROPHONE
 SYSTEMS