


For Installation drill hole 24.0mm or 0.94" Diameter

Rubber Shock Mount. Table "cut out" 24.00mm or 0.94"

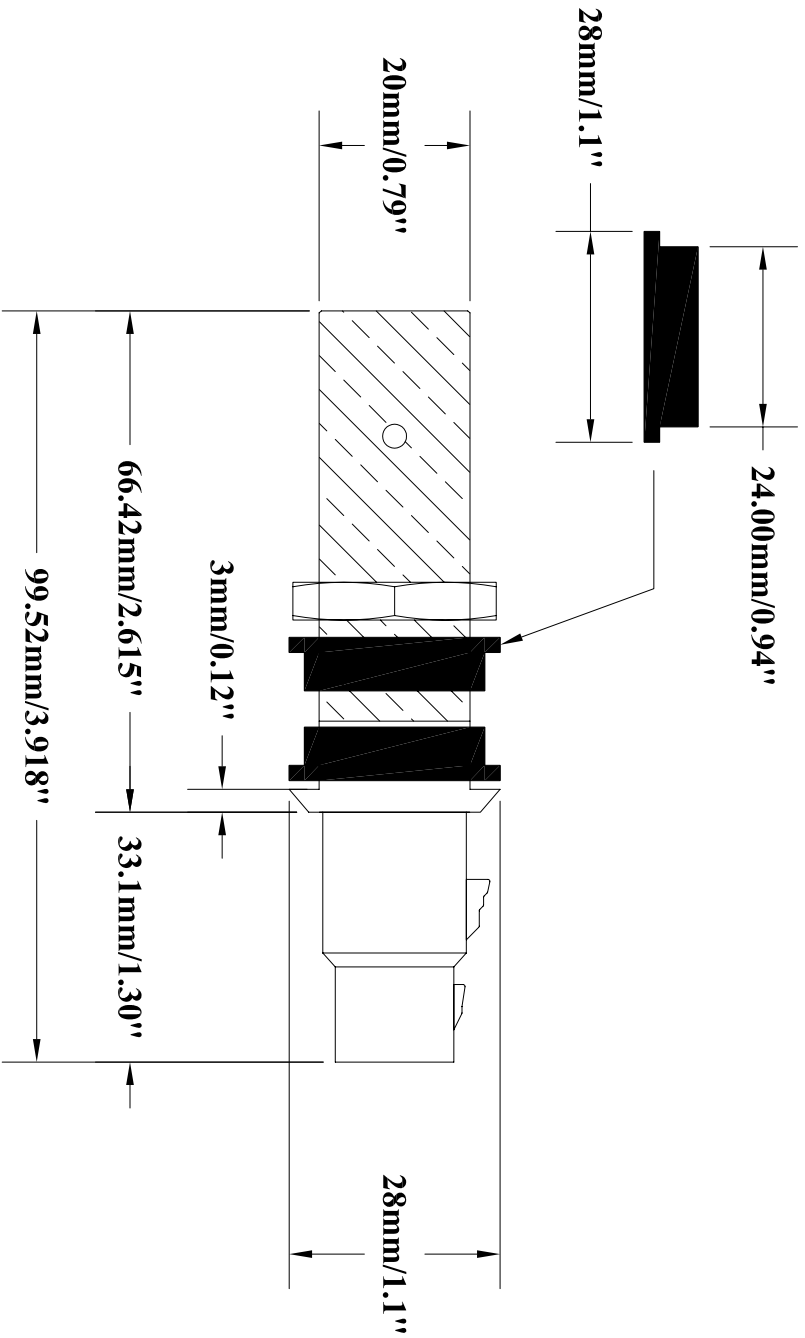

Wiring Configuration For 3 Pin Male XLR

- PIN 1 ----- Screen
- PIN 2 ----- Phase +
- PIN 3 ----- Phase -

Wiring Configuration For 3 Pin Female XLR

- PIN 1 ----- Screen
- PIN 2 ----- Phase +
- PIN 3 ----- Phase -

Drawing No. **700**

ISSUE	DESCRIPTION	APPD	DATE	DRAWING BY	TITLE
1	Through Table Shock Mount			M-A Lacoste	SM10
				TRACED	DATE
				CHECKED	13-05-2008
				APPROVED	Drawing No. 700

CLOCKAUDIO