

Architects and Engineers Specifications for Gooseneck Dynamic Microphone D43E/D44E




The dynamic gooseneck microphone shall have a cardioid polar pattern and be optimised for speech purposes. The microphone shall have a robust high quality brass construction using an 8mm flexible shaft terminated with a male 3 Pin XLR. Applications will include: Paging, Intercom, Ticket counter, Bus, Train, Restaurant, Dispatch desk.

Frequency response: 150 Hz to 12 KHz; Sensitivity -60.0dB ± 3dB @ 1Khz (0dB =1V/Pa); Impedance 200 ohm.

The microphone will have a low reflective satin black finish and be available in different lengths:

14 in/300mm (D43E), 18 in/400mm (D44E).

The microphone shall be a Clockaudio D43E or D44E.

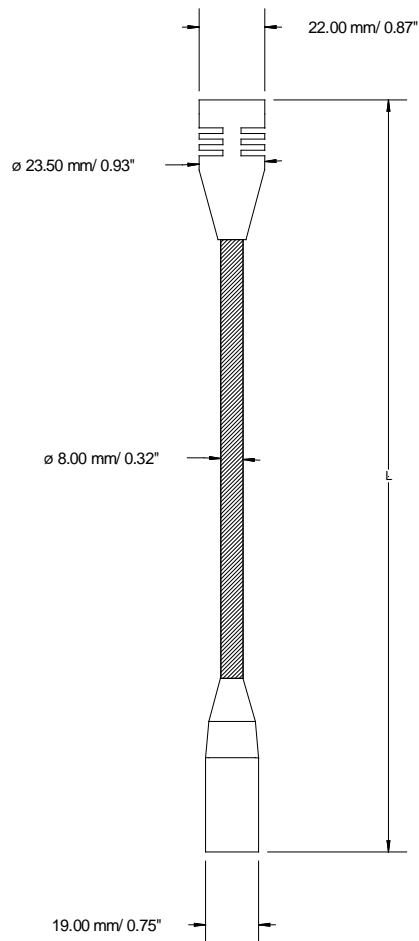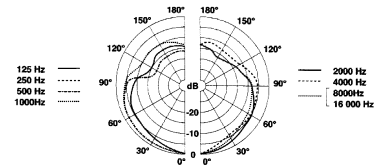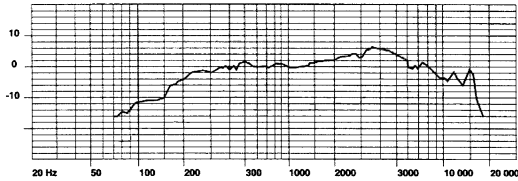

Wiring Configuration for XLR termination

PIN 1 = Screen

PIN 2 = Signal +

PIN 3 = Ground -