

CLOCKAUDIO

C009E
BOUNDARY
LAYER
PROFESSIONAL
MICROPHONE

Designed for easy use on large surfaces in a wide range of professional sound situations. Ideal for mounting on walls, floors, piano etc. The hemispherical polar pattern provides natural sound with a good sense of depth for optimum bass.



- Boundary layer condenser microphone
- Omni directional polar pattern
- Wide range smooth response
- Very low profile
- Stone Grey Nextel finish



PROFESSIONAL
MICROPHONE
SYSTEMS

CLOCKAUDIO

C009E BOUNDARY LAYER PROFESSIONAL MICROPHONE

SPECIFICATIONS

TYPE	Condenser (back electret)
POLAR PATTERN	Omni directional (beyond boundary)
FREQUENCY RESPONSE	30 Hz - 20 KHz
SENSITIVITY	-42.5 dB +/- 3 dB @ 1 KHz (0dB = 1V/Pa)
IMPEDANCE	200 Ohms
S/N RATIO	68 dB(A)
MAXIMUM SPL	120 dB 1% THD
POWER REQUIREMENTS	9 - 48 volts phantom power
SWITCHABLE BASS FILTER	-4 dB per octave at 400 Hz to -6 dB per octave at 100 Hz
SWITCHABLE PAD	-10 dB
CABLE	10 ft (3 metres)
TERMINATION	XLR
DIMENSIONS	6.4" x 0.36" (160mm x 9mm)
FINISH	Stone Grey Nextel

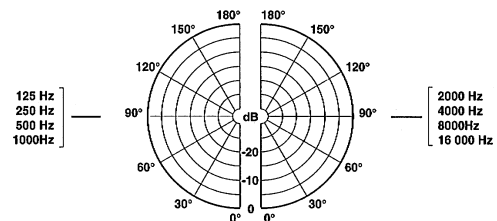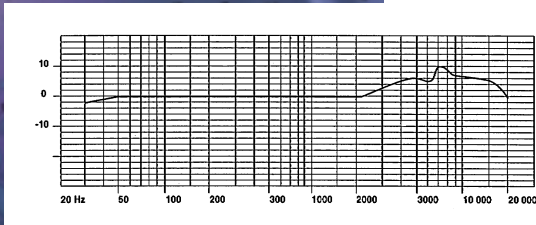

CLOCKAUDIO

Clockaudio Limited

9 Stratfield Park, Elettra Avenue, Waterlooville, Hampshire PO7 7XN

Tel: +44 (0)23 9225 1193 • Fax: +44 (0)23 9225 1201

E-mail: sales@clockaudio.demon.co.uk www.clockaudio.demon.co.uk

Clockaudio North America

18 Peladeau, N.D. Ile Perrot, Quebec, Canada J7V 7P2

Tel: (514) 453-1838 • Fax: (514) 323-3773

E-mail: info@clockaudio.com www.clockaudio.com

PROFESSIONAL
MICROPHONE
SYSTEMS

As part of a continuous product improvement programme, we reserve the right to alter specifications without prior notice.