


CLOCKAUDIO®

Phantom Power Unit CPPW 01

The Unit is designed as an external source of phantom power used to power electret, condenser or boundary microphones. Its discrete housing enables it to be placed either in a ceiling or under a table away from the microphone itself.

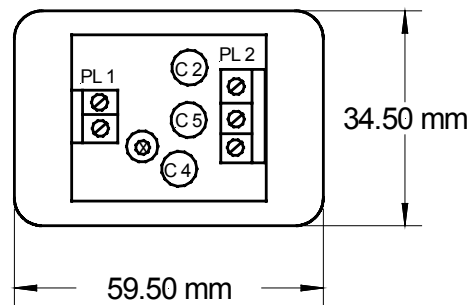

Connections:

Microphone connections "PL1":
Screw terminal 1 = Phase + (Hot)
Screw terminal 2 = Phase - (Cold)

Output connections "PL2":
Screw terminal 2 = Phase + (Hot)
Screw terminal 3 = Phase - (Cold)
Screw terminal 1 = Ground

