DRG. No. 449



For through table Installation pre drill a 10mm or 0.39" hole to fit bolt

60.00 mm/2.36"

22.00 mm/0.87"

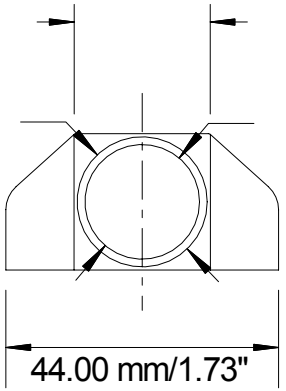

22.00 mm/0.87"

ø 21.00 mm/0.83"

ø 18.50 mm/0.73"

44.00 mm/1.73"

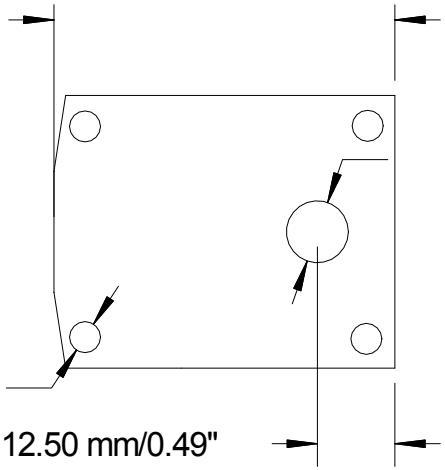

60.00 mm/2.36"

ø 10.00 mm/0.39"

Rubber feet

12.50 mm/0.49"

Supplied with Bolt, M 10 Nut and Shakeproof Washer

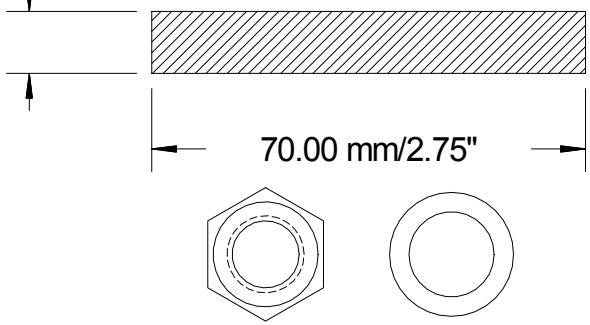

10.00 mm/0.39"

70.00 mm/2.75"

Polar pattern: half cardioid

Wiring Configuration:

Red wire phase +

White wire phase –

Screen Ground

ISSUE	DESCRIPTION	APP'D	DATE		TITLE	DRAWN	TRACED	CHECKED	APPROVED	DATE
	Consultancy Series			CLOCKAUDIO	CS 1-RF	C B				08/05/06
						DRAWING No. 449				