

CLOCKAUDIO



C008E
BOUNDARY
LAYER
PROFESSIONAL
MICROPHONE

Developed for speech purposes in a wide range of pro and live sound applications including conference, lecturn and theatre.



- Boundary layer condenser microphone
- Cardioid polar pattern
- Fully balance
- High quality engineering in solid brass
- Concealed cable and fixing screw mounting
- Non-reflective anthracite nextel finish



PROFESSIONAL
MICROPHONE
SYSTEMS

CLOCKAUDIO

C008E BOUNDARY LAYER PROFESSIONAL MICROPHONE

SPECIFICATIONS

TYPE	Condenser (back electret)
POLAR PATTERN	Half Cardioid
FREQUENCY RESPONSE	50 Hz - 18 KHz
SENSITIVITY	- 47 dB +/- 3 dB @ 1 KHz (0 dB = 1 V/Pa)
IMPEDANCE	200 Ohms
S/N RATIO	64 dB(A)
MAXIMUM SPL	125 dB 1% THD
POWER REQUIREMENTS	9 - 48 volts phantom power
CABLE	10 ft (3 metres)
TERMINATION	Male XLR
DIMENSIONS	2.8" x .9" (70mm x 22mm)
MOUNTING	2 x M6 set screws
FINISH	Stone grey nextel
PACKING	4.4" x 3.2" x 1.7" (110mm x 80mm x 42mm)
NETT/SHIPPING WEIGHT	1.05/1.1 lbs (480/510 grms)

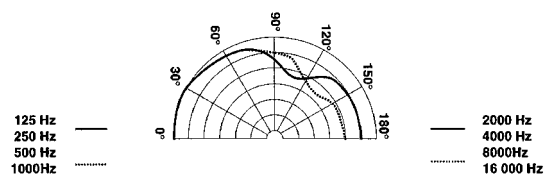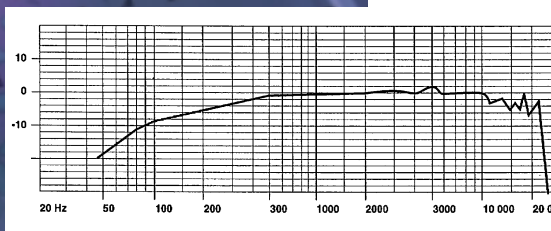

CLOCKAUDIO

Clockaudio Limited

9 Stratfield Park, Elettra Avenue, Waterlooville, Hampshire PO7 7XN

Tel: +44 (0)23 9225 1193 • Fax: +44 (0)23 9225 1201

E-mail: sales@clockaudio.demon.co.uk www.clockaudio.demon.co.uk

Clockaudio North America

18 Peladeau, N.D. Ile Perrot, Quebec, Canada J7V 7P2

Tel: (514) 453-1838 • Fax: (514) 323-3773

E-mail: info@clockaudio.com www.clockaudio.com

PROFESSIONAL
MICROPHONE
SYSTEMS

As part of a continuous product improvement programme, we reserve the right to alter specifications without prior notice.