DRG. No. 500

Rubber Shock Mount. Table "cut out" 24.00 mm or 0.94"

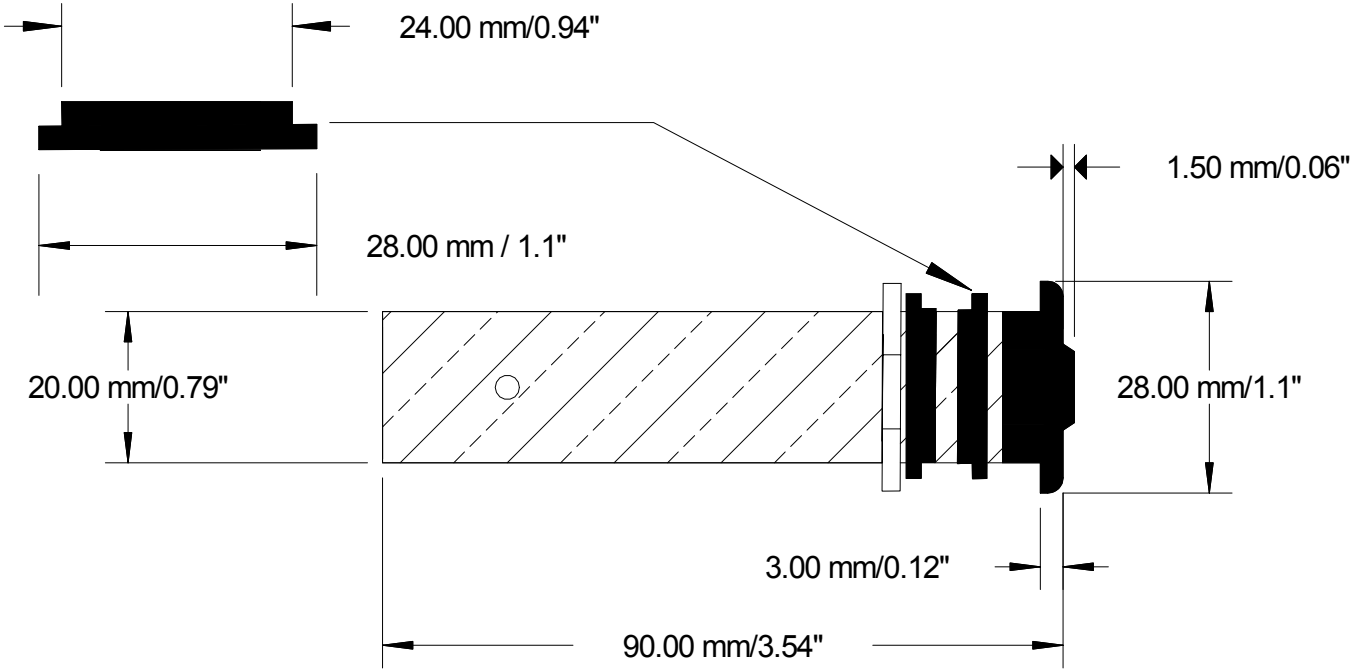

Wiring Configuration For 3 Pin Male Tini Q (TB3M)

PIN 1---------Phase -

PIN 2---------Phase +

PIN 3---------Not Used

Wiring Configuration For XLR Termination

PIN 1---------Screen

PIN 2---------Phase +

PIN 3---------Phase -

ISSUE	DESCRIPTION	APP'D	DATE
1	Through Table Shock Mount		
	"RF Friendly"		

CLOCKAUDIO

TITLE	DRAWN	TRACED	CHECKED	APPROVED	DATE
SM 20-RF	C B				01/03/07
	DRAWING No. 500				