



CLOCKAUDIO®

C8SE-RF
'RF FRIENDLY'
SUSPENDED
MINI
SHOTGUN
MICROPHONE

Mini shotgun hypercardioid condenser microphone designed to be suspended in places of worship, conference halls, theatres etc.

- Immune to RF artifacts
- Consistent high quality sound
- Slimline design
- Short flexible shaft
- Strong lightweight cable
- Knuckle for easy adjustment
- Engineered in high quality brass
- Finished in satin black or white
- Ceiling mount available as optional extra

PROFESSIONAL
MICROPHONE
SYSTEMS

C8SE-RF

'RF FRIENDLY'

SUSPENDED

MINI SHOTGUN

MICROPHONE





CP73
CEILING PLATE

Diameter 74mm Height 14mm
fitted with locking cable gland

SPECIFICATIONS

TYPE	Condenser (Back Electret)			
POLAR PATTERN	Hypercardioid			
FREQUENCY RESPONSE	50Hz - 18KHz			
SENSITIVITY	-47dB ± 3dB @ 1KHz (0dB = 1 VPa)			
IMPEDANCE	200 Ohms			
S/N RATIO	64dB (A)			
MAXIMUM SPL	125dB 1% THD			
POWER REQUIREMENTS	9 - 48 Volts Phantom Power via PPA-1-RF or CPPW-01-RF			
CABLE	7.5 metre (24.6ft)			
TERMINATION	Male 3 Pin XLR			
FINISH	Satin Black/White			
ACCESSORIES	W8 foam windshield included			
DIMENSIONS	Overall Length	Head Diameter	Flexible Shaft	Weight
	330mm (13")	12mm (0.5")	6mm (0.23")	218g (7.7oz)
SHIPPING INFORMATION	Length	Width	Depth	Weight
	460mm (18.1")	35mm (1.4")	35mm (1.4")	254g (9oz)

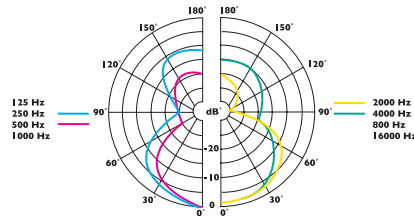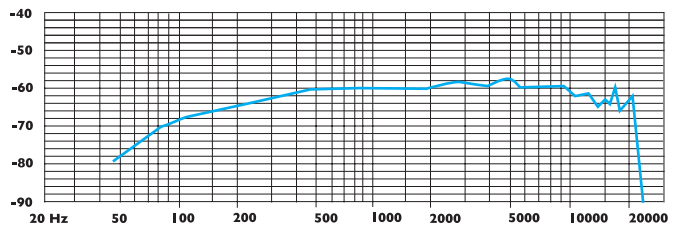

CLOCKAUDIO®

Clockaudio Ltd - Headquarters

22 Arnside Road, Waterlooville, Hampshire PO7 7UP, UK
Tel +44 (0)23 9225 1193 • Fax +44 (0)23 9225 1201
e-mail sales@clockaudio.co.uk

Clockaudio North America Inc.

2891 du Meunier, Unit 103, Vaudreuil-Dorion, Quebec J7V 8P2, Canada
Tel: (450) 424-9797 • Fax: (450) 424-3660
e-mail: info@clockaudio.com

www.clockaudio.com

PROFESSIONAL
MICROPHONE
SYSTEMS