


CLOCKAUDIO®

CMH 2000
LIGHTWEIGHT
HEADWORN
BOOM MICROPHONE

Designed for use in theatres, presentations, broadcast studios and productions, places of worship and other applications requiring low profile headworn professional microphone.

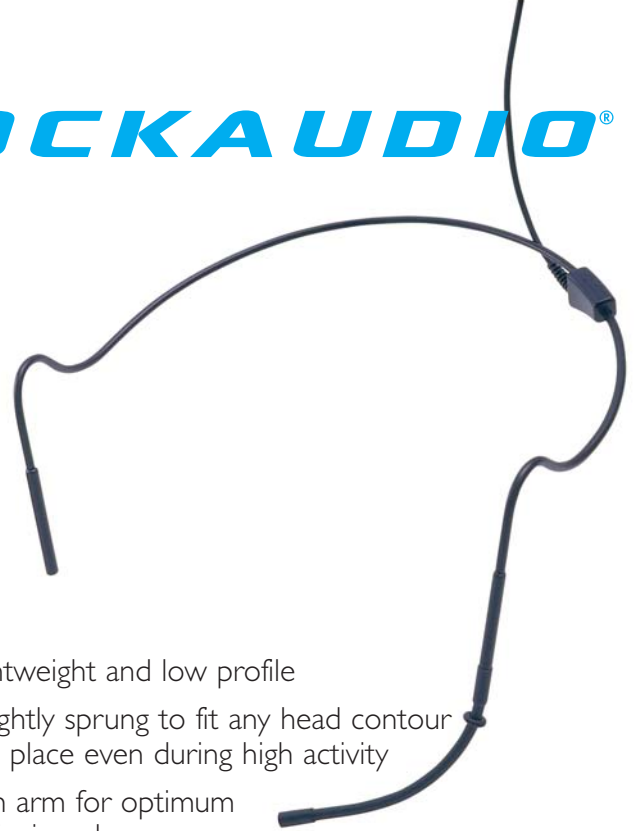

- Extremely lightweight and low profile
- Shaped and lightly sprung to fit any head contour and remain in place even during high activity
- Flexible boom arm for optimum positioning of microphone
- Perspiration drip barrier to protect microphone
- Omni Directional back electret condenser microphone
- Wide band smooth response
- Black/beige easy to clean finish

HWI 500 RUGGED
LIGHTWEIGHT
HEADWORN
BOOM MICROPHONE

Designed for presentations, commentators, broadcast reporters and instructors. Particularly suitable for active aerobic and fitness instructors.



- Plastic injected headband, gooseneck and capsule head for protection against corrosion
- Cables retain flexibility even with long exposure to perspiration and cosmetics
- Shaped, lightly sprung and with headband to fit all head contours comfortably and remain in place even with vigorous activity
- Flexible boom arm for optimum positioning of microphone
- Waterproofed Bi-directional close talking back electret condenser microphone with smooth low feedback response

CMH 2000
LIGHTWEIGHT
HEADWORN
BOOM MICROPHONE

HWI 500 RUGGED
LIGHTWEIGHT
HEADWORN
BOOM MICROPHONE

PROFESSIONAL
MICROPHONE
SYSTEMS

SPECIFICATIONS

CMH2000

TYPE	Condenser (Back Electret)
POLAR PATTERN	Omni Directional
FREQUENCY RESPONSE	30Hz - 18KHz
SENSITIVITY	-33dB \pm 3dB @ 1KHz (0dB = 1Vpa)
IMPEDANCE	4.4K Ohms
MAXIMUM SPL	115dB
POWER REQUIREMENTS	1.5 - 9V (standard operating voltage 1.5V)
CABLE	140cms (55")
TERMINATION	4 Pin Tini-Q Connector
WEIGHT	30g (1.06oz)
FINISH	Black and Beige

HWI 500

TYPE	Condenser (Back Electret)
POLAR PATTERN	Bi-directional close talking
FREQUENCY RESPONSE	300Hz - 5KHz
SENSITIVITY	6mVpa
IMPEDANCE	1K Ohms
MAXIMUM SPL	120dB
POWER REQUIREMENTS	1.3 - 12V (standard operating voltage 1.5V)
CABLE	140cms (55")
TERMINATION	4 Pin Tini-Q Connector
ACCESSORIES	WI5 Windshield included
WEIGHT	70g (2.47oz.)
FINISH	Black

CLOCKAUDIO®

Clockaudio Ltd - Headquarters

22 Arside Road, Waterlooville, Hampshire PO7 7UP, UK
Tel +44 (0)23 9225 1193 • Fax +44 (0)23 9225 1201
e-mail sales@clockaudio.co.uk

Clockaudio North America Inc.

2891 du Meunier, Unit 103, Vaudreuil-Dorion, Quebec J7V 8P2, Canada
Tel: (450) 424-9797 • Fax: (450) 424-3660
e-mail: info@clockaudio.com

www.clockaudio.com